


MCT Brattberg ALF Datasheet

Size (mm)
ALF 60
ALF 90
ALF 90x2
ALF 120
ALF 120x2
ALF 150
ALF 150x2
ALF 90+90
ALF 90+90x2
ALF 120+120 (240)
ALF 120+120x2 (240x2)
ALF 150+150 (300)

ALF TYPE 1 (Standard)

The designations are the inner dimensions of the packing area, the bolt holes are $\varnothing 7$ mm for all types. All information drawings & cut-outs are available on the website.

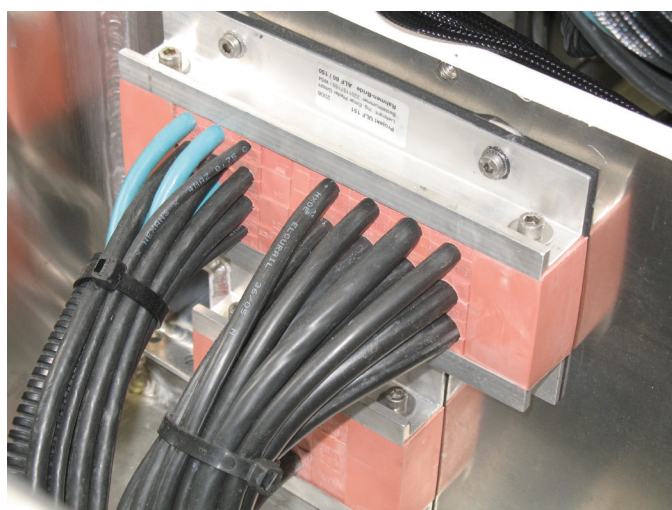

Material components parts

Side Bars, Centre Bar:	Aluminium Grade 6060 T66
End Blocks:	Lycron
Surface treatment:	Anodized
Screws & Washers:	A4 Stainless Steel
Gasket:	Cell-EPDM

ALF is installed with MCT Brattberg Lycron Blocks.
Lycron is halogen free and flame retardant.

MCT Brattberg ALF Datasheet

Size (mm)	Weight (kg)
ALF 90	0.634
ALF 90x2	1.093
ALF 120	0.686
ALF 120x2	1.175
ALF 150	0.717
ALF 150x2	1.24
ALF 90+90	1.04
ALF 90+90x2	1.615
ALF 120+120 (240)	1.135
ALF 120+120x2 (240x2)	1.763
ALF 150+150 (300)	1.1
ALF 150+150x2 (300x2)	2.096

ALF TYPE 2 (ALU)

The designations are the inner dimensions of the packing area, the bolt holes are Ø7 mm for all types.

All information drawings & cut-outs are available on the website.



Material components parts

Side Bars, Centre Bar, End Blocks:	Aluminium Grade 6063
Screws & Washers:	A4 Stainless Steel
Gasket:	AD16 Closed Cell Silicone Foam Gasket

ALF is installed with MCT Brattberg Lycron Blocks.
Lycron is halogen free and flame retardant.

MCT Brattberg ALF Datasheet

Size (mm)	Weight (kg)
ALF 90	0.634
ALF 90x2	1.093
ALF 120	0.686
ALF 120x2	1.175
ALF 150	0.717
ALF 150x2	1.24
ALF 90+90	1.04
ALF 90+90x2	1.615
ALF 120+120 (240)	1.135
ALF 120+120x2 (240x2)	1.763
ALF 150+150 (300)	1.1
ALF 150+150x2 (300x2)	2.096

ALF TYPE 2 (EMC)

The designations are the inner dimensions of the packing area, the bolt holes are $\varnothing 7$ mm for all types.

All information drawings & cut-outs are available on the website.



Material components parts

Side Bars, Centre Bar, End Blocks: Aluminium Grade 6063

Surface treatment: Iridite NCP

Screws & Washers: A4 Stainless Steel

Gasket: AD16 Closed Cell Silicone Foam Gasket

EMI Gasket: ECP 400 Polyurethane soft foam gasket with conductive fabric - UL94-VO

Earth Strap: STBE220 Earth Strap 220mm x 4mm²

ALF is installed with MCT Brattberg Lycron Blocks.
Lycron is halogen free and flame retardant.

MCT Brattberg ALF Datasheet

PERFORMANCE ALL ALF

STANDARD	RATING
EN-45545-3 / EN-1363-1	ALF transit in Stainless steel and ALU = EI30 E60 *No Conduit
UL50 NEMA	3R / 4X / 12
IEC 60529	IP66 / IP67

ALF is installed with MCT Brattberg Lycron Blocks.
 Lycron is halogen free and flame retardant.

202404100J



Sweden

Head office
 MCT Brattberg AB
 Phone: +46 - 455 37 52 00
 Email: info@mctbrattberg.se

Address
 SE-371 92 Karlskrona, Sweden

United Kingdom

MCT Brattberg Ltd
 Phone: +44 - 170 624 4890
 E-mail: info@mctbrattberg.co.uk

Address
 Commerce Street
 Carrs Industrial Estate Haslingden
 Lancashire BB4 5JT, England

USA

MCT Brattberg Inc
 Phone: +1 346 260 9124
 Email: sales@brattberginc.com

Address
 3332 Spring Stuebner Rd.
 Suite G, Spring, TX 77379, USA

Australia

MCT Brattberg Australia Pty Ltd
 Phone: +61 (0)44 710 4422
 Email: info@mctbrattberg.com.au

Address
 Level 2, Margaret Graham Building
 Lot Fourteen
 1a Frome Road
 Adelaide, SA 5000, Australia

United Arab Emirates

MCT Brattberg UAE
 Dubai, United Arab Emirates
 Phone: +971 50 277 2151
 Email: sony.jose@mctbrattberg.ae

Please visit our website for contact information to your closest MCT Brattberg representative:

www.mctbrattberg.com